

## Jig Saw P1 cc MaxiMAX case in the T-MAX

ref.no.: 917103

EAN: 4032689172767

► Transport and storage box T-MAX




### Technical data

Stroke height	26 mm
No-load number of strokes	800-3000 1/min
Nominal power input	900 W
Weight	2,5 kg
Universal motor	230 V / 50 Hz

### Delivery specification

- 3 jig saw blades CUnex W1, W2, W+P2
- 1 Parallel guide fence P1-PA; Ref. No. 205448
- 1 base plate P1-GP; Ref. No. 204350
- 1 hose connector P1-AS; Ref. No. 203917
- 1 chip deflector P1-SA; Ref. No. 204353
- 1 splinter guard P1-SS; Ref. No. 205447
- 1 glider P1-G; Ref. No. 205464
- 1 Mains cable 4 m (13.1 ft)

## Examples for usage

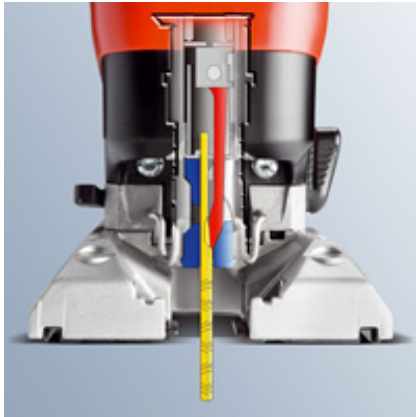

Innovative CUMax sawblade clamping ensures a positive fit because of a wedge pushing against the blade. This design reliably fastens the sawblade so that it cannot be displaced.



The CUnex W1 consists of two separate, soldered sawblades. The blade's strength and wedge shape ensure precise and square sawing, even when cutting curves.



If exactly straight cuts are required, the P1 cc can be used in conjunction with the MAFELL F guide rail.



In order not to compromise the strength of the standard sole plate, a separate tilting plate was developed for the P1 cc.

## Applications

---

- ▶ Straight cuts with guide rail and CUnex
- ▶ Guided circle cutting with P1-PA parallel fence and CUnex
- ▶ Recesses
- ▶ Bevel cuts up to 45°
- ▶ Compatible materials depend on sawblade; see special accessories/tools

## Advantages

---

- ▶ The iF Product Design Award 2011 for the Jig Saw P1 cc.
- ▶ To change the sawblade, simply release the locking lever. With just one hand, effortlessly remove the blade and insert the replacement.
- ▶ The high-performance CUprex compact motor delivers consistently high speeds, even when executing long cuts.
- ▶ The vacuum channel integrated in the sole plate guarantees outstanding dust extraction directly alongside the sawblade.

## Description

---

Owing to its ergonomic design, with low center of pressure and soft pads, the P1 cc is comfortable to hold in every situation.































Sophisticated self-extraction and a clever integrated blower keep the work surface free from chips, even if a dust extractor is not connected. The workplace therefore remains clean at all times.

The P1 cc offers continuously variable speeds in the range 800 to 3000 strokes/min., so that the output can be adjusted exactly to suit the material.

The sole plate, with integrated vacuum channel, is as sturdy as it looks. By way of a quick-release mechanism, it remains reliably fastened to the saw at an exact right angle.

Its intelligent accessories give the P1 cc unprecedented versatility. The innovative design of the new MAFELL precision sawblade CUnex W1, in particular, facilitates extremely precise sawing.

## Accessories / Tools

	<b>Guide rail F 80</b> 0,8 m (2,6 ft) long		<b>Jig saw blade CUnex W1</b> 2 pieces
	<b>Guide rail F 110</b> 1.1 m (3.6 ft) long		<b>Jig saw blade W2</b> 5 pieces
	<b>Guide rail F 160</b> 1.6 m (5.2 ft) long		<b>Jig saw blade W3</b> 5 pieces
	<b>Guide rail F 210</b> 2,1 m (6,9 ft) long		<b>Jig saw blade W4</b> 5 pieces
	<b>Guide rail F 310</b> 3,1 m (10,2 ft) long		<b>Jig saw blade W5</b> 5 pieces
	<b>Jig saw blade W6</b> 5 pieces		<b>Connecting piece F-VS</b> for joining two guide rails
	<b>Jig saw blade W+P2</b> 5 pieces		<b>Angle fence F-WA</b>
	<b>Jig saw blade W+M2</b> 5 pieces		<b>Jig saw blade L2</b> 5 pieces
	<b>Suction clamping system Aeroxfix F-AF 1</b> with 1,3 m rail, adapters for above and underneath rail, flexible hose		<b>Jig saw blade M2</b> 5 pieces
	<b>Flexible hose FXS-L</b> up to 3,2 m (10.6 ft) long		<b>Guide pocket F 160</b> for guide rails up to 1,6 m
	<b>Jig saw blade E+F2</b> 1 piece		<b>Guide pocket set</b> 2 x F 160 + F-VS + 2 x F-SZ 100 MM + 1 guide pocket
	<b>Assortment 1</b> 4 x W2, W+P2, W5, W4, 2 x CUnex W1		<b>Guide pocket set</b> F 80 + F 160 + F-WA + F-VS + 2 x F-SZ 100MM + Guide pocket
	<b>Assortment 2</b> 4 x M2, W6, L2, W+M2, 2 x CUnex W1		<b>End cap F-EK</b> 2 pieces
	<b>Parallel guidel fence P1-PA</b> incl. circular cutter		<b>Splinter guard P1-SS</b> 5 pieces
	<b>Tilting plate P1-SP</b> tilting range +/- 45°		<b>Screw clamp F-SZ 100MM</b> 2 pieces, for fixing guide rail to workpiece
	<b>Splinter guard F-SS 3,4M</b> 3.4 m (11.2 ft.) long		<b>Non-slip profile F-HP 6,8 M</b> 6.8 m (22.3 ft.) long



## contact

---

MAFELL AG

Beffendorfer Straße 4  
D-78727 Oberndorf / Neckar  
Germany

Tel.: +49 7423 / 812-114  
Fax: +49 7423 812-102  
Email: [export@mafell.de](mailto:export@mafell.de)