


## Slot Mortising Attachment SG 400

ref.no.: 201000

EAN: 4032689081786

- ▶ Tilt range 45 °
- ▶ boxed

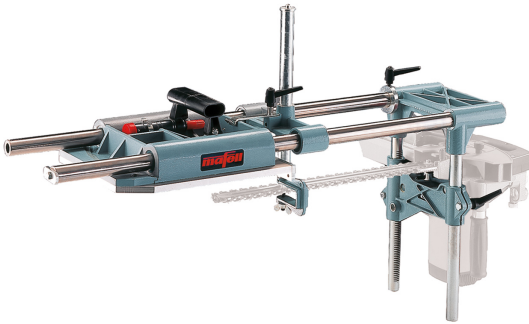

### Technical data

Mortising depth vertical / horizontal	300 / 400 mm
Mortising width in one cut (with 300 mm set)	6 - 17 mm
Mortising width in one cut (with 400 mm set)	10 - 17 mm
Mortising length in one cut	50 mm
Weight	24,8 kg

### Delivery specification

1 Grease gun; Ref. No. 076158

## Examples for usage


---



High-precision cuts for high quality gusset plate connections in woodwork engineering.



The cutting depth can be set exactly.

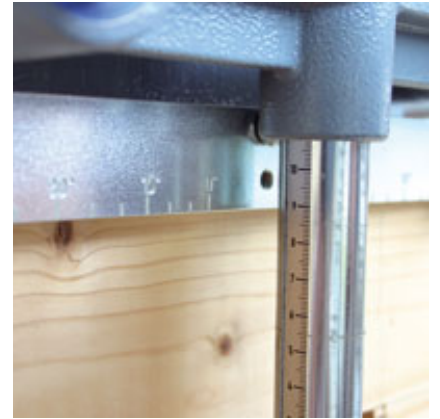

The vertical edge spacing is set exactly by way of a scale.



The slot mortiser can be tilted through 45° in either direction.

## Applications

---

- ▶ Compatible materials include solid wood and laminated beams

## Advantages

---

- ▶ Robust, torsion free guide support stand – for perfect size slots.
- ▶ Slot width of 6 mm (1/4 in.) or 10 - 17 mm (3/8 - 11/16 in.) – for various applications.

## Description

---































Together with the LS 103 Ec Chain Mortiser, the SG 400 is the ideal attachment, e.g. for preparing large glulam workpieces for the insertion of connection pieces.

The impressive mortising depth of up to 400 mm (15 3/4 in.) is ensured by the exact coordination of the slot attachment with the basic machine.

The exact special chain guide and the cutting depth stop guarantee that the measurement is adhered to from the beginning to the end of the cut.

The complete unit can of course be tilted up to 45°.

## Accessories / Tools

- |   |   |   |  |
|---|---|---|--|
|    | <b>Chain bar</b><br>for mortising width 6 - 7 mm  |    | <b>Chain bar</b><br>for mortising width 10 - 11 mm   |
|    | <b>Chain 6 x 300 mm; LS 103 / SG 400</b><br>for mortising width 6 mm (50 sets of links)   |    | <b>Chain 10 x 400 mm; LS 103 / SG 400</b><br>for mortising width 10 mm (59 sets of links)                    |
|    | <b>Sprocket</b><br>for mortising width 6 - 7 mm   |    | <b>Chain bar</b><br>for mortising width 8 - 9 mm   |
|    | <b>Chain bar</b><br>for mortising width 12 - 17 mm  |    | <b>Chain 7 x 300 mm; LS 103 / SG 400</b><br>for mortising width 7 mm (50 sets of links)                      |
|    | <b>Chain 11 x 400 mm; LS 103 / SG 400</b><br>for mortising width 11 mm (59 sets of links) |    | <b>Sprocket</b><br>for mortising width 8 - 9 mm  |
|    | <b>Chain bar</b><br>for mortising width 10 - 11 mm  |    | <b>Chain 8 x 300 mm; LS 103 / SG 400</b><br>for mortising width 8 mm (50 sets of links)                      |
|  | <b>Chain 12 x 400 mm; LS 103 / SG 400</b><br>for mortising width 12 mm (59 sets of links) |  | <b>Clamping device</b><br>Maximum clamping width 300 mm. Illustration shows clamping device fitted on SG 400 |
|  | <b>Chain bar</b><br>for mortising width 12 - 17 mm  |  | <b>Chain 9 x 300 mm; LS 103 / SG 400</b><br>for mortising width 9 mm (50 sets of links)                      |
|  | <b>Chain 13 x 400 mm; LS 103 / SG 400</b><br>for mortising width 13 mm (59 sets of links) |  | <b>Chain 10 x 300 mm; LS 103 / SG 400</b><br>for mortising width 10 mm (50 sets of links)                    |
|  | <b>Chain 14 x 400 mm; LS 103 / SG 400</b><br>for mortising width 14 mm (59 sets of links) |  | <b>Chain 11 x 300 mm; LS 103 / SG 400</b><br>for mortising width 11 mm (50 sets of links)                    |
|  | <b>Chain 15 x 400 mm; LS 103 / SG 400</b><br>for mortising width 15 mm (59 sets of links) |  | <b>Chain 12 x 300 mm; LS 103 / SG 400</b><br>for mortising width 12 mm (50 sets of links)                    |
|  | <b>Chain 16 x 400 mm; LS 103 / SG 400</b><br>for mortising width 16 mm (59 sets of links) |  | <b>Chain 13 x 300 mm; LS 103 / SG 400</b><br>for mortising width 13 mm (50 sets of links)                    |
|  | <b>Chain 17 x 400 mm; LS 103 / SG 400</b><br>for mortising width 17 mm (59 sets of links) |  | <b>Chain 14 x 300 mm; LS 103 / SG 400</b><br>for mortising width 14 mm (50 sets of links)                    |
|  | <b>Chain 15 x 300 mm; LS 103 / SG 400</b><br>for mortising width 15 mm (50 sets of links) |  | <b>Chain 16 x 300 mm; LS 103 / SG 400</b><br>for mortising width 16 mm (50 sets of links)                    |
|  | <b>Chain 17 x 300 mm; LS 103 / SG 400</b><br>for mortising width 17 mm (50 sets of links) |  | <b>Sprocket</b><br>for mortising width 10 - 11 mm  |



Sprocket  
for mortising width 12 - 17 mm

## contact

---

MAFELL AG

Beffendorfer Straße 4  
D-78727 Oberndorf / Neckar  
Germany

Tel.: +49 7423 / 812-114  
Fax: +49 7423 812-102  
Email: [export@mafell.de](mailto:export@mafell.de)